




OEM

Fujitsu F50

Rugged performance at an affordable price.

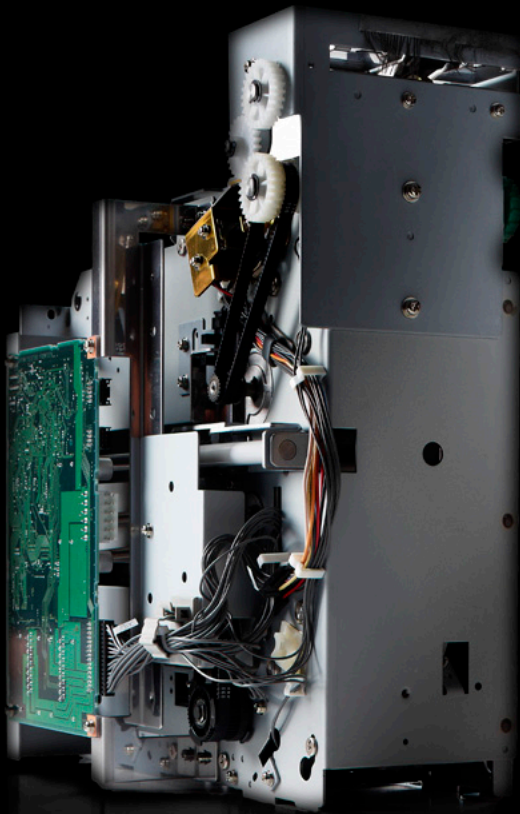

Preferred single capacity dispenser for self service kiosks.

- No cassette required
- Rock solid performance with low MTBF
- Small footprint
- 1000 note capacity
- Spray presenter

ARCA

1151 Holmes Rd, Mebane, NC 27302 | +1 919 442 5200
arcatechsystems.com | info@arcatechsystems.com



OEM

Fujitsu F50

Specifications

Dimensions (W x D x H)		10.87" x 5.87" x 12.95" (276 mm x 149 mm x 329 mm)
Weight (W/O media)		15.43 lbs (7 kg)
Service Access		Front or Side
Bill Count Speed		1.5 Notes / Second
Media Specs	Dimensions	Max. 3.23" x 6.50" (82 mm x 165 mm) Min. 2.56" x 5.12" (65 mm x 130 mm)
	Thickness	.0028" - .0059" (0.07 - 0.15 mm) Banknotes
Bills / Transaction		99 Bills / Transaction
Bill Retrieval		None
Reject Bin		Integrated
Reject Bill Area Capacity		20 notes
Bill Low Sensor		None
Interface		RS232C
Electrical Power Requirements		DC +24V +-10% Max. 4A Ave. 4A DC +5V +-5% Max. 2A
Temperature	Operation	32° F - 90° F (0° C - 32° C)
	Stop State	-23° F - 122° F (-5° C - 50° C)
Relative Humidity	Operation	10% - 85%
	Stop State	8% - 95%