




OEM

Fujitsu F510

Front or rear service bunch dispenser.

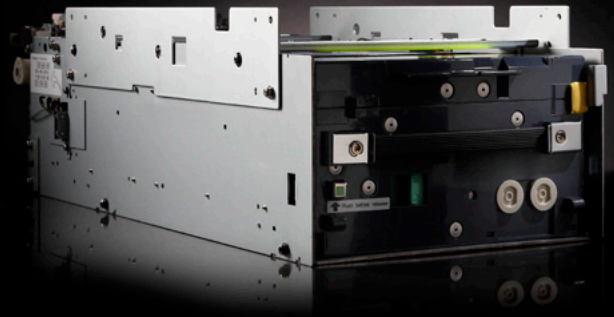

Configurable up to 6 high for up to 18,000 note capacity, 3,000 notes per cassette.

Fujitsu's low-profile, high capacity F510 media dispenser with state of the art reliability.

- 7 notes per second
- 3000 notes per cassette
- RS232 interface
- Shutter option available to meet numerous applications
- Unique pooling feature with ability to retract notes prior to short dispense

ARCA



OEM

Fujitsu F510

Specifications

Dimensions (W x D x H)	Front Access	11.02" x 29.61" x 31.89" (280mm x 752mm x 810mm)
	Rear Access	11.02" x 29.80" x 31.89" (280mm x 757mm x 810mm)
Weight (W/O media)		72kg
Service Access		Front or Rear
Number of Cassettes		Up to 6 Cassettes
Bill Count Speed		7 Bills / Second
Media Specs	Dimensions	Max. 3.23" x 6.77" (82 mm x 172 mm) Min. 2.36" x 4.72" (60 mm x 120 mm)
	Thickness	.0024" - .0071" (0.06 - 0.18 mm) Banknotes Up to .0118" (0.3 mm) Other Media* *Certification of other media is required
Bills / Transaction		60 Bills / Transaction
Bill Retrieval		Yes / Bunch Presenter
Shutter		Option
Capacities / Denominations		Accommodation 14.57" (370 mm) New US Note 3000 Each Cassette (approx.)
Reject Bin		In 1st Cash Cartridge
Reject Bill Area Capacity		Approximately 150 Bills
Bill Low Sensor		Adjustable Sensor - Factory Set Approximately 100 Notes
Interface		RS232C
Electrical Power Requirements		DC +24V +-10% Max. 10A Ave. 4A
Temperature	Operation	32° F - 104° F (0° C - 40° C)
	Stop State	-23° F - 122° F (-5° C - 50° C)
Relative Humidity	Operation	10% - 85%
	Stop State	8% - 95%

ARCA

1151 Holmes Rd, Mebane, NC 27302 | +1 919 442 5200
arcatechsystems.com | info@arcatechsystems.com